


# GS5 Series

- **Class A fire resistant (possible on request)**
- Outstanding performance in low-light conditions
- Low temperature coefficient (Pmax):  $-0.36\% / ^\circ\text{C}$
- $0\sim+5\text{W}$  positive tolerance - to assure high output
- Lower internal current, lower hotspot temperature
- Cell crack risk limited in small region, enhance the module reliability
- Excellent anti-PID module design, TÜV SÜD certified
- Certified to withstand high wind loads (2400pa) and snow loads (5400pa)
- Salt mist and ammonia corrosion resistant

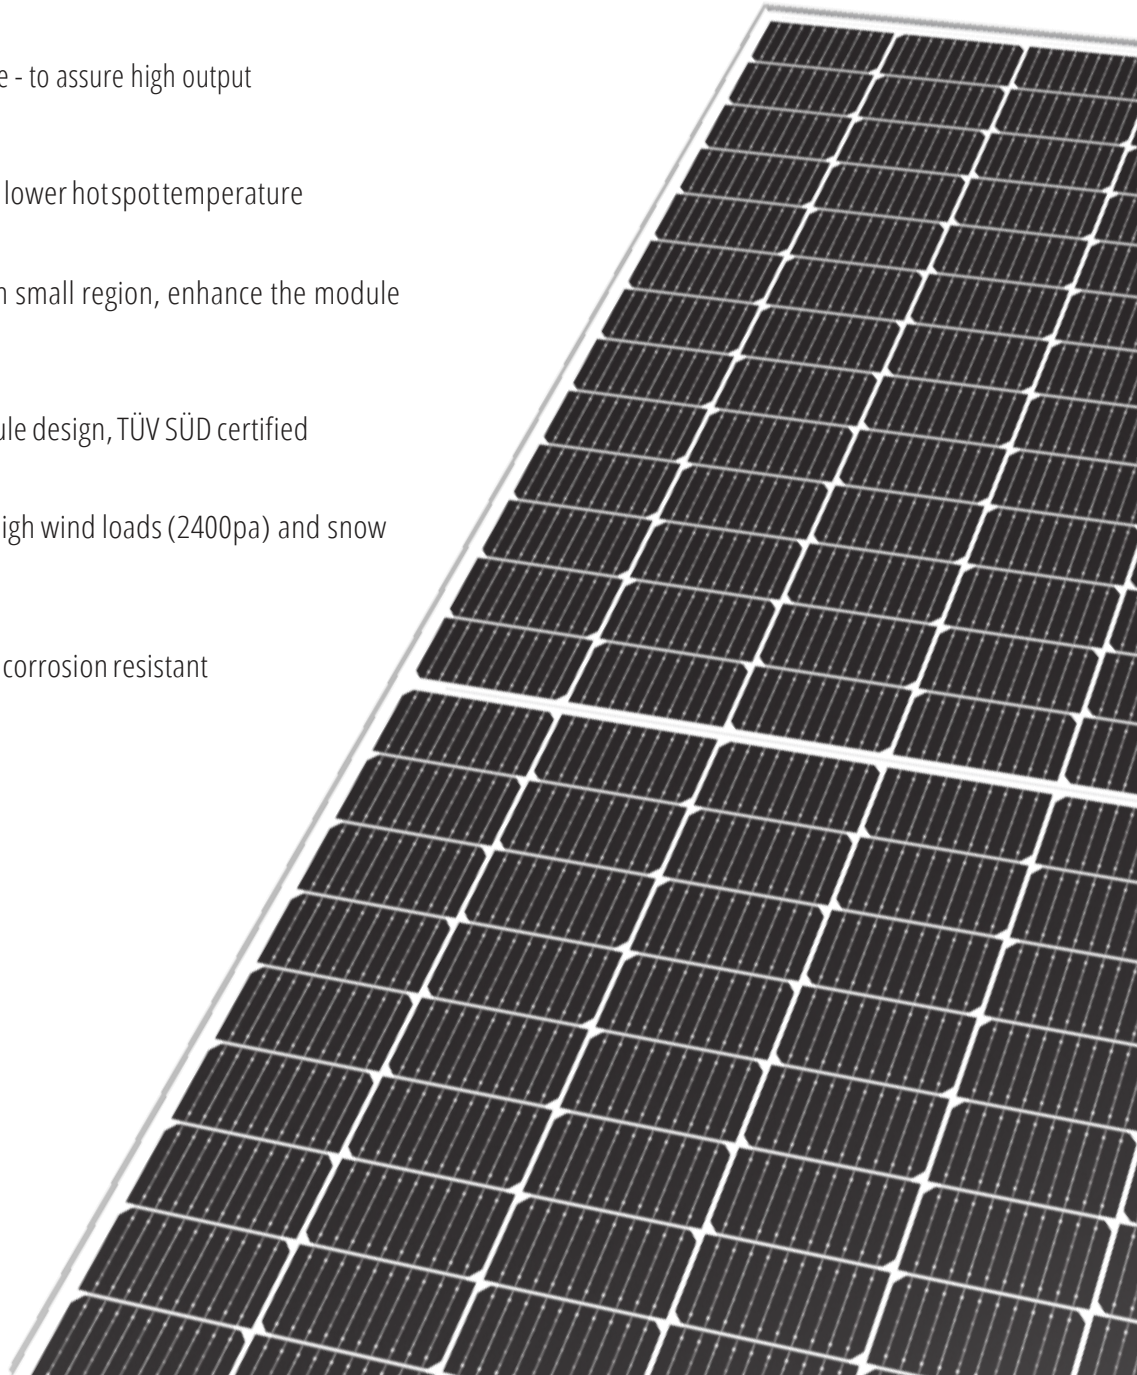

## Electrical parameters at Standard Test Conditions (STC)

Module Type								
Power output	(w)	Pmax	530	535	540	545	550	
Power output tolerances	(w)	ΔPmax						0+5W
Module efficiency	(%)	ηm	20.4	20.6	20.8	21.0	21.2	
Voltage at Pmax	(V)	Vmpp	40.8	41.0	41.2	41.4	41.6	
Current at Pmax	(A)	Impp	13.00	13.05	13.11	13.17	13.23	
Open circuit voltage	(V)	Voc	49.0	49.2	49.4	49.6	49.8	
Short circuit current	(A)	Isc	13.76	13.81	13.87	13.93	13.99	

STC: 1000W/m<sup>2</sup> irradiance, 25°C cell temperature, AM1.5g spectrum according to EN 60904-3. Average relative efficiency reduction of 5% at 200W/m<sup>2</sup> according to EN 60904-1.

## THERMAL CHARACTERISTICS

Nominal operating cell temperature	NOCT	°C	45 +/-2
Temperature coefficient of Pmax	γ	% / °C	-0.36
Temperature coefficient of Voc	βVoc	% / °C	-0.26
Temperature coefficient of Isc	Isc	% / °C	+0.043

## OPERATING CONDITIONS

Max. System Voltage	1000V/1500V/DC (IEC)
Max. series fuse rating	25 A
Limiting reverse current	20 A
Operating temperature range	-40°C to 85°C
Max. static load, front (e.g., snow)	5400 Pa
Max. static load, back (e.g., wind)	2400 Pa
Max. hailstone impact (diameter/velocity)	25 mm / 23 m / s

## MECHANICAL CHARACTERISTICS

Front Cover (material / thickness)	AR Coating tempered glass / 3.2 mm
Cell (quantity)	144pcs (6x12x2)
Encapsulant (material)	EVA
Frame material	anodized aluminum alloy
Junction box (protection degree)	IP68 with bypass-diode
Cable (length / cross sectional area)	4mm <sup>2</sup> (portrait:300mm/landscape:1400mm)
Plug connector (type / protection degree)	MC4 / IP68
Fire Safety Classification (IEC 61730)	Class C

Specifications are subject to change without notice.

## GENERAL CHARACTERISTICS


Dimensions	2279mm/1134mm/35 mm
Weight	29 kg
Packing Information	31 pcs/Carton, 620 pcs/40HQ

★

STC: Irradiance 1000W/m<sup>2</sup>

Cell Temperature 25°C

AM=1.5

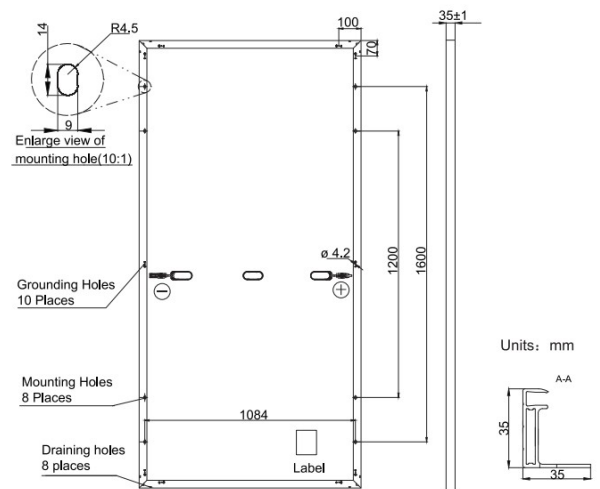

## IV-Curves

